


**ZWICK**  
ARMATUREN GMBH 



**TRI-BLOCK**


**DOUBLE BLOCK & BLEED**  
**MAXIMUM SAFETY**

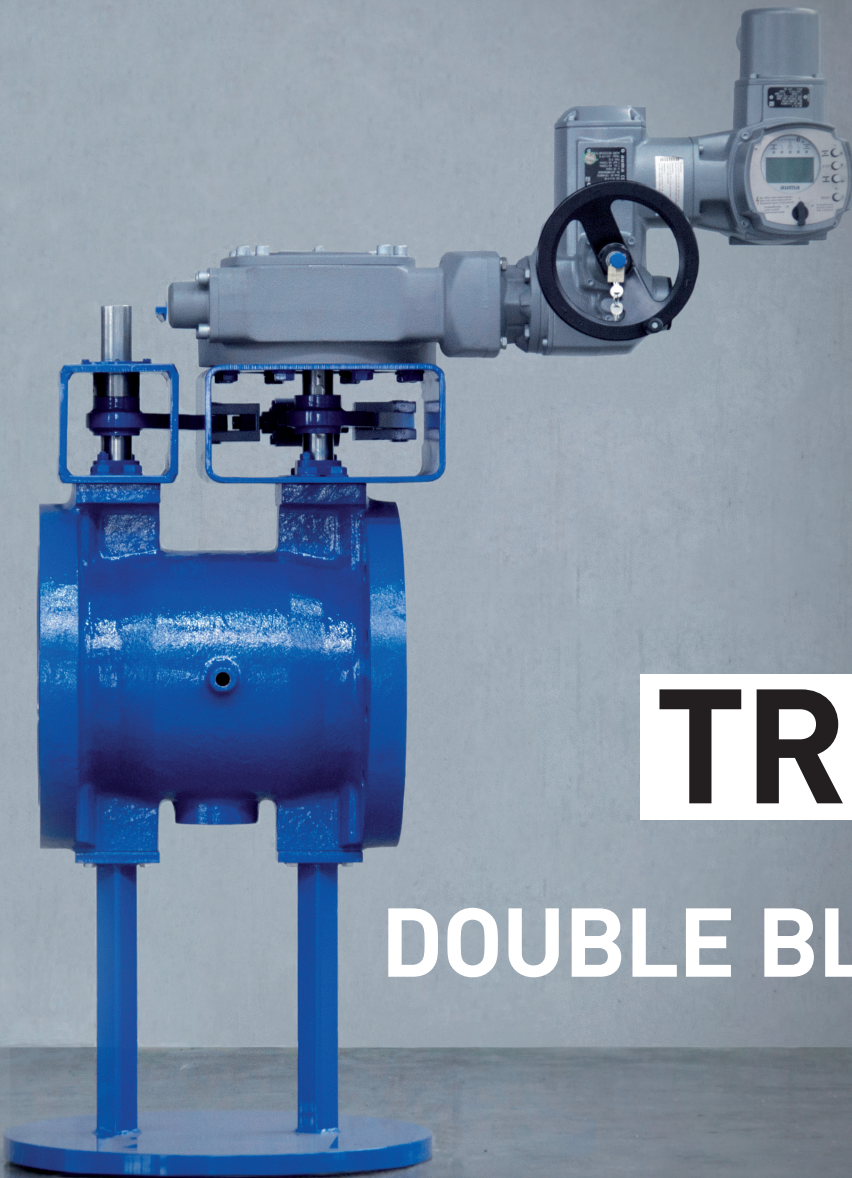

# HIGH STANDARD VALVES FOR NON-STANDARD CONDITIONS.


## TRI-BLOCK

- DN 80 - 1200 / 3" - 48"
- PN 10 - 100 / ANSI 150 - 600
- DIB and DBB configuration
- Metal seated
- Up to 2 Bleed ports integrated (individual)
- Leakage rate A-C according to DIN EN 12266-1 for liquids and gases
- -50°C to +425°C (depending on material)
- Material: Carbon Steel & Stainless Steel, other Alloys on request
- Face – Face dimension for example: EN 558-1 (to replace gate or ball valves)

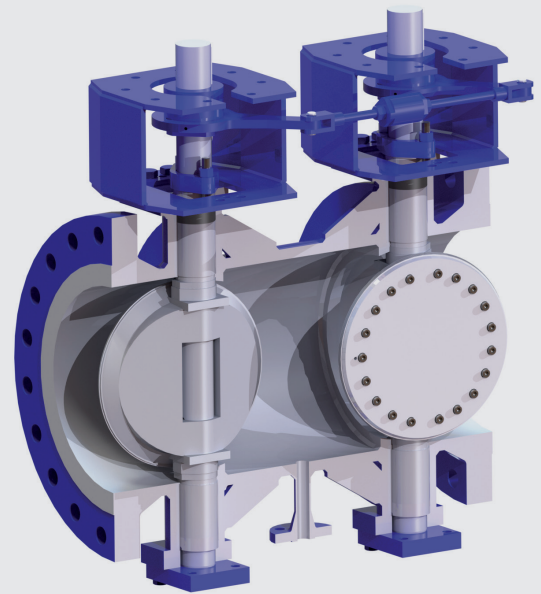

## APPLICATIONS

- C3 / C4 / Butadiene / Styrene / Hydrocarbons
- Tank storage
- Hydrogen & NH3
- Technical Gases
- Water / Steam / Condensate / Vapors

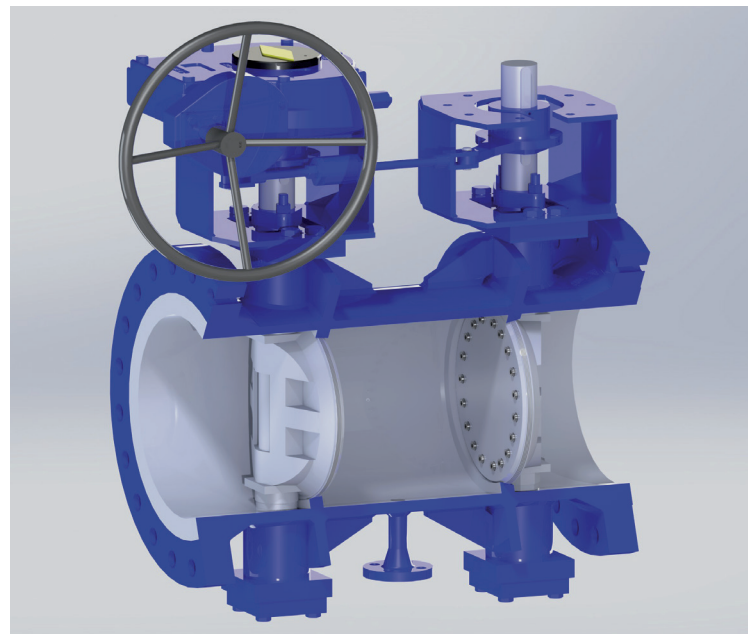

**ZWICK**  
ARMATUREN GMBH

Egerstr. 1 & 25  
D-58256 Ennepetal  
TEL +49 (0) 23 33 / 98 56 5  
FAX +49 (0) 23 33 / 98 56 6  
MAIL [info@zwick-gmbh.de](mailto:info@zwick-gmbh.de)

[WWW.ZWICK-VALVES.COM](http://WWW.ZWICK-VALVES.COM)